

Ecostat

Bath thermostat 1001 CL for exposed installation

Surfaces: **Chrome** Article Number: **13201000**



Description

product features

- projection 182 mm
- 2 functions
- centre distance: 150 ± 12 mm
- spray type mixer: normal spray
- flow rate for bath spout at 3 bar: 20 l/min
- flow rate of hand shower at 3 bar: 17 l/min
- thermostat cartridge, shut-off valve
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- safety lock at 40° C
- temperature limitation adjustable
- non-return valve
- with silencer
- material handles: metal
- connection type: s-shaped connections
- connection dimension: DN15
- dirt filter included


Technology



Product image



Scale drawing

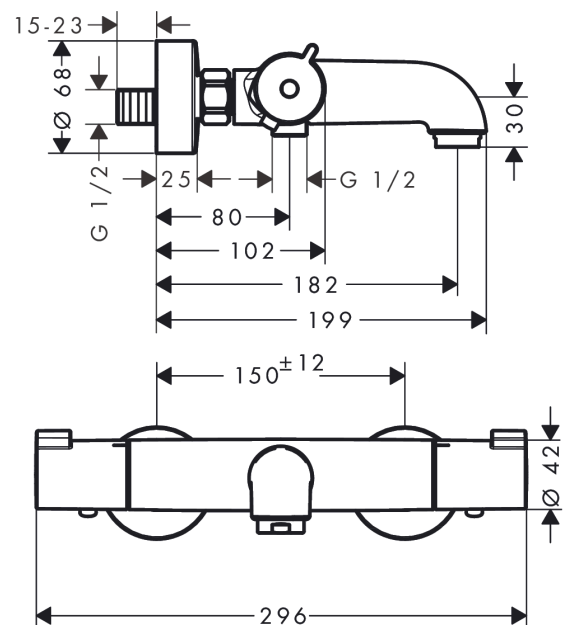

Ecostat
Bath thermostat 1001 CL for exposed installation
 Surfaces: **Chrome** Article Number: **13201000**



Flowchart

